


15-20 LBS. FORCE DOWN

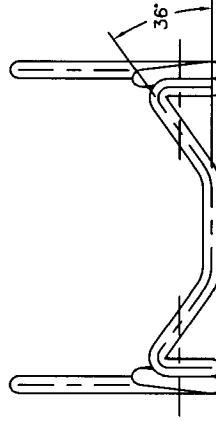

-001 SPRING

OIL TEMPERED SPRING WIRE, .0910		GIBBS WIRE & STEEL CO.	ASTM-A-229-93
-001		PART NO.	MATL SPEC
NO. REQ'D PER ASSY		NAME	STOCK SIZE
PROPRIETARY RIGHTS NOTICE		LIST OF MATERIAL	
THESE DATA ARE PROPRIETARY TO GIBBS WIRE & STEEL CO. AND ARE NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT PERMISSION IN WRITING FROM GIBBS WIRE & STEEL CO.		UNLESS OTHERWISE SPECIFIED	5/29/02
X ± .1		CHECK	D. NELSON
XX ± .03		STRESS	D. MURPHY
XX ± .010		PROL	
ANGLES ± .1°		HEAT TREAT	
FINISH		SCALE	2:1
2		DWG. NO.	41232-000-001
NEXT ASSEMBLY		DWG. NO.	41232-200-003
REV.		Gibbs Wire & Steel Co.	
REV.		IR	